


RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	


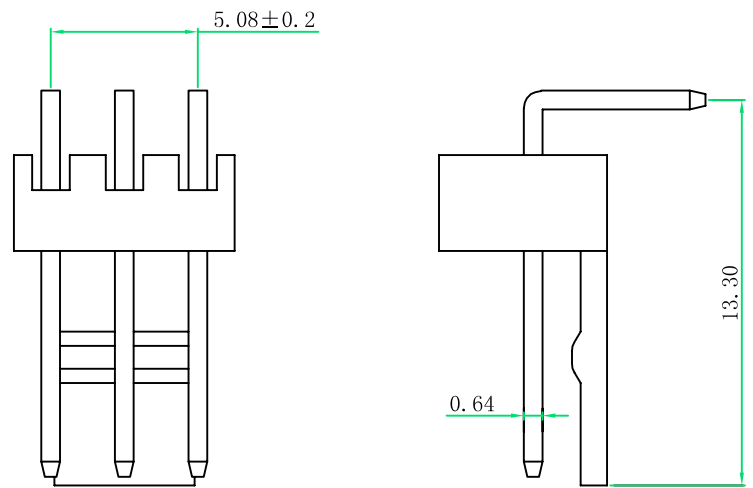


■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

■ WAFER

- Material: Base: Nylon 66 UL94V-0
pin: Brass Tin-plated or Square Pin

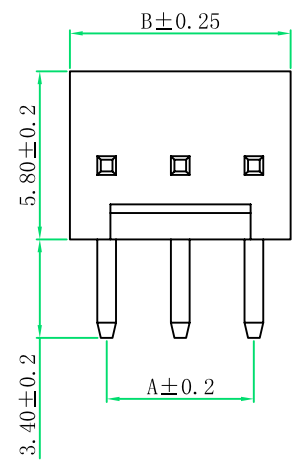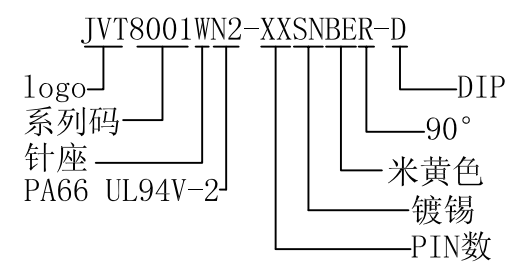

Poles	DIM		Poles	DIM	
	A	B		A	B
2	2.54	5.08	10	22.86	25.40
3	5.08	7.62	11	25.40	27.94
4	7.62	10.16	12	27.94	30.48
5	10.16	12.70	13	30.48	33.02
6	12.70	15.24	14	33.02	35.56
7	15.24	17.78	15	35.56	38.10
8	17.78	20.32	16	38.10	40.64
9	20.32	22.86	20	48.26	50.80

投影 (PROJECT)		公差 (TOLERANCE)	
单位 (UNIT)	mm	0 ± 0.40	
比例 (SCALE)	FIT	0.0 ± 0.30	
版本 (EDITION)	A	0.00 ± 0.20	
日期 (DATE)	2014 04 14	0.000 ± 0.05	

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	
审核 (CHECKED)	
核准 (APPROVE)	

品号 (PART NO)	JVT8001WN2-XXSNBE-D	页次 (PAGE)	
图号 (DRAW NO)	065-8001-02		1/1
品名 (NAME)	MOLEX2510 2.54 90° WAFER 米黄色		